


THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).

EXTR. DATE: 11-02-2023 11:50:04

STREAM NO.:13

REV. CAUSE ID: 7

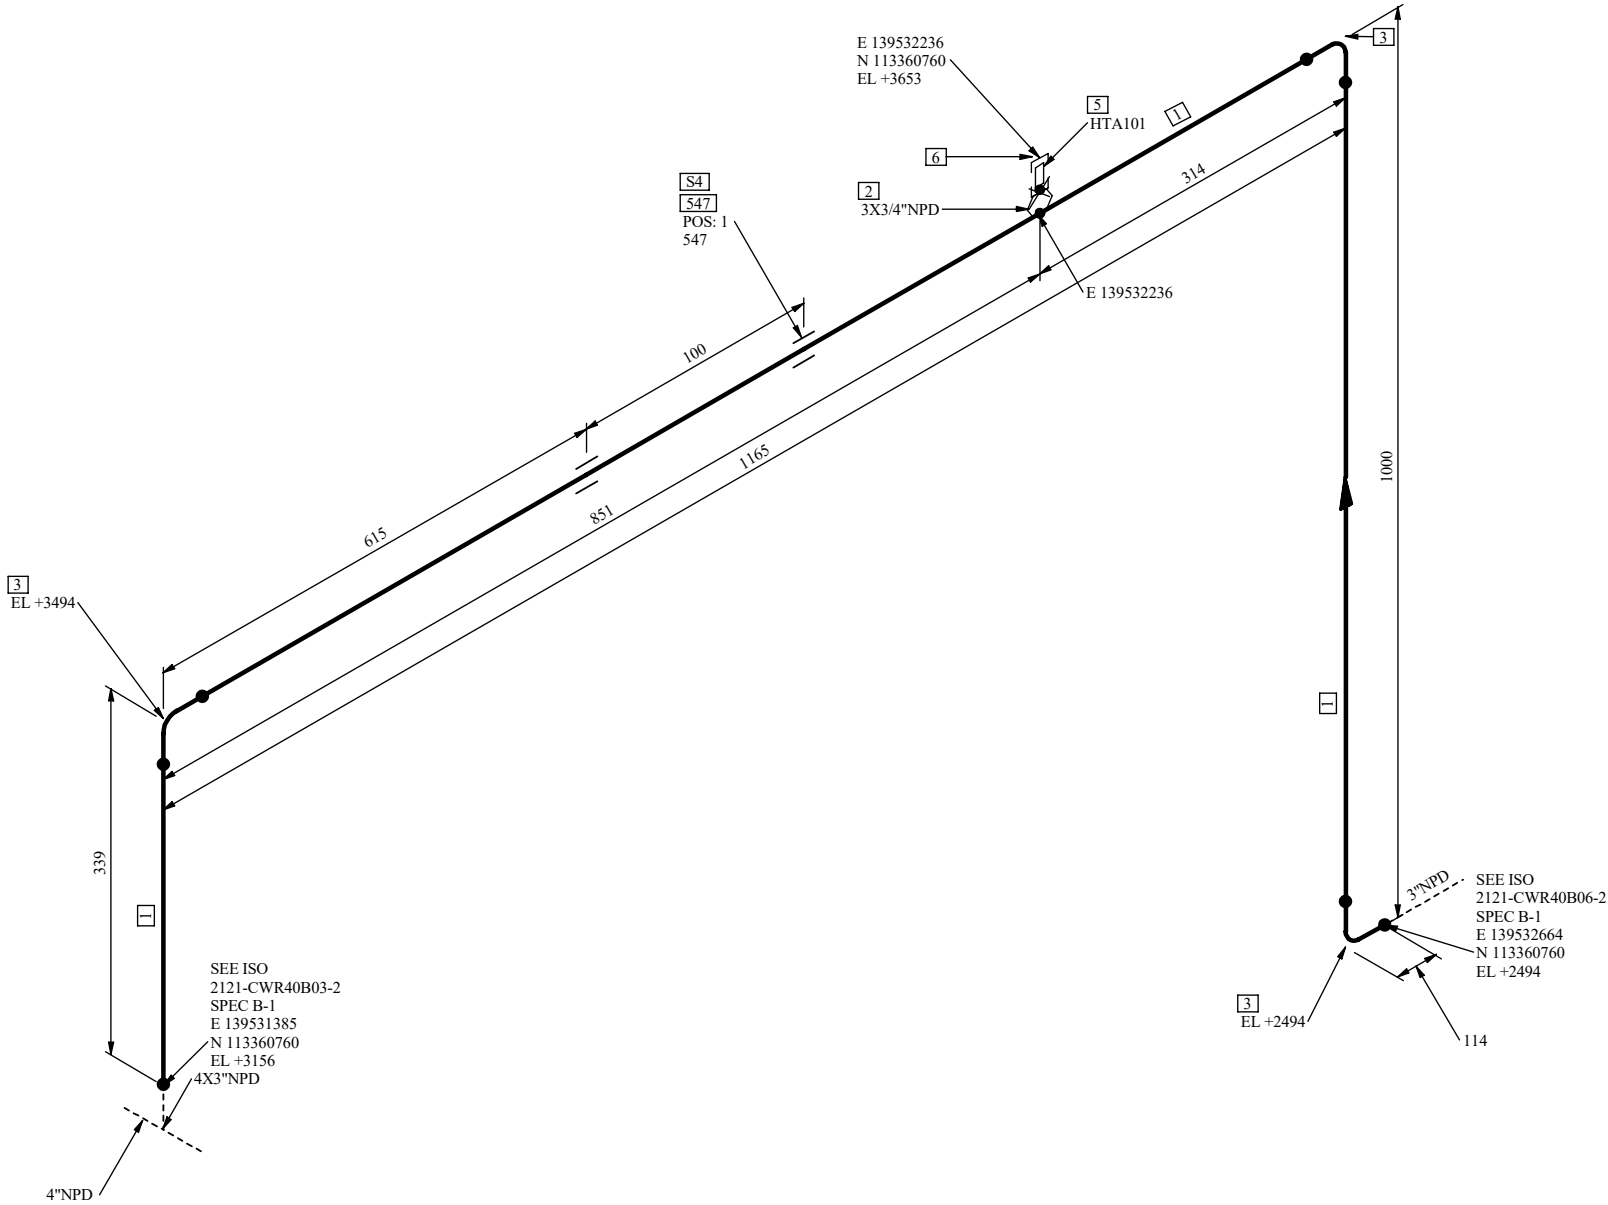

REMARKS FOR MECHANICAL SUBCONTRACTOR:

- 1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.
- 2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.
- 3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT
- 4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
- 5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.
- 6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.
- 7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.
- 8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603).
- 9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.

SUPPORTS LEGEND:	DENOTES PARTS LIST NO	PIPE SUPPORT	A=RESTING SUPPORT WHERE WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.	G=GUIDE	F=AXIAL STOP	B=ANCHOR	M=SPRING	S=TEFLON PAD
------------------	-----------------------	--------------	---	---------	--------------	----------	----------	--------------

							STRESS CALC. N°
							-
							P & ID 19-A-19-000-1-01-00001 sheet 29B
00	ISSUED FOR CONSTRUCTION	10-FEB-23	M.YADAV	P.VAZE	G.PAGANONI		LINE LIST N° 19-L-19-000-2-00-80602
REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	PIPE LAYOUT N° 19-L-19-000-2-00-86192 sheet 2

APPROVED FOR CONSTRUCTION

Signature for construction is shown on Iso list of relevant CWA

TITLE
ISOMETRIC DRAWING LINE
3"-CWR-40B06-B-1

BILL OF MATERIAL					
PT NO	COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY	HOLD STATUS
PIPE					
1	PIPE - A106-B BE SMLS T01AC03V02 S-STD <PIPA010B13STD> (L-7806).	3	I117921	2.0 M	
FITTINGS					
2	REDUCING SOCKOLET MSS-SP-97 3000# A105N BE SWE - R13DNC44V101 NREQD <SOKA300LB01511> (L-343)	3X3/4	I1651368	1	
3	90 LR ELBOW ASME B16.9 A234-WPB BE SMLS C01DC04V01 S-STD <90LA200F33STD> (L-7955).	3	I128599	3	
PIPE SUPPORTS					
4	VERT.TRESTLES WELDED TO STR TR31 L100X100X10	3	547	1	
FITTINGS					
5	NIPPLE - - A106-B PE MTE SMLS LENGTH 100mm R03AQC03ZW04 S-XS <NTOA010E1111624> (L-7888)	3/4	I2221184	1	
6	CAP ASME B16.11 3000# A105N FTE NREQD - R41FNC442001 NREQD <CATA300KBK3/4> (L-79)	3/4	I1651686	1	