
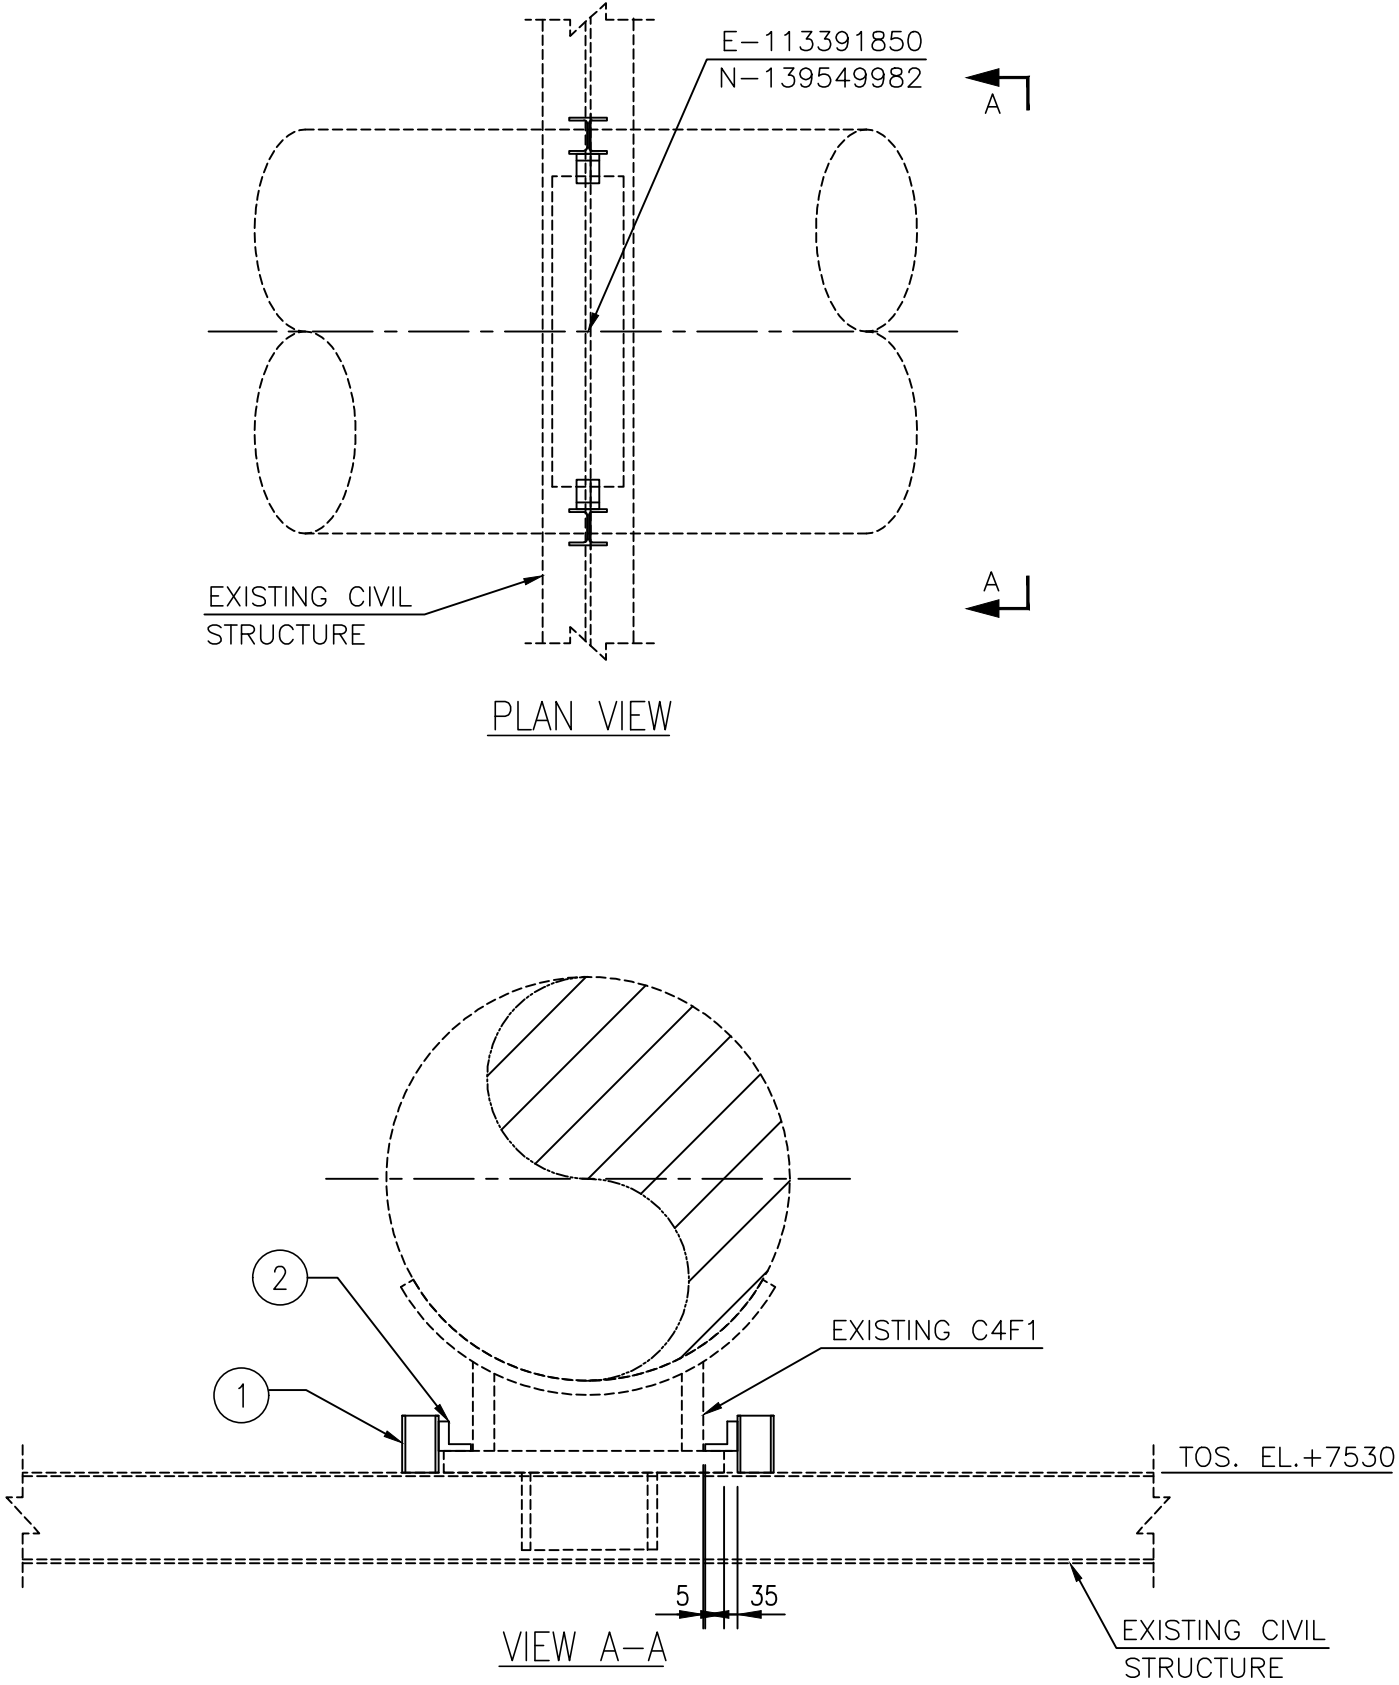


ESTE DOCUMENTO ES PROPIEDAD DE REPSOL, NO PUEDE SER COPIADO, REPRODUCIDO Y / O USADO SIN PREVIA AUTORIZACIÓN DE REPSOL. PLANO INFORMATIZADO (NO REVISAR MANUALMENTE).  
THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).



BILL OF MATERIAL			
SR.NO.	DESCRIPTION	QTY.	WIEGHT (Kg.)
1	HE100 L=150	2	5.1
2	L 60x8 L=120	2	1.7

”\*” SUPPORT HEIGHT TO BE ADJUSTED AS PER SITE CONDITION.

- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETER.
  2. FULLY INSULATED TRUNION (SUPPORT) INSULATION SHALL COVER THE ENTIRE TRUNION UP TO THE BASE PLATE A PER THE DRAWING. TRUNION AND CLOSURE PLATE SHALL HAVE THE SAME INSULATION MATERIAL AND THICKNESS OF THE RUN PIPE.
  3. ALL FILLET WELDS SHALL BE GROUND TO SMOOTH CONCAVE CONTOUR.
  4. SUPPORT WELDING SHALL BE IN ACCORDANCE WITH DOC. 4274-XH-SW-00000001
  5. WELDED JOINTS USED FOR FABRICATION OF SUPPORT SHALL HAVE CONTINUOUS SEAM EXAMINED BY LIQUID PENETRANT TEST ON 100% OF JOINTS.
  6. PIPING LONGITUDINAL WELD SHALL BE ORIENTED TO AVOID INTERFERENCE WITH SUPPORT WELDINGS.
  7. THE DRAWING REVISION INDEX SHOWN IN TITLE BLOCK IS REFERRED TO THIS SUPPORTS ONLY. FOR THIS WHOLE DOCUMENT REVISION REFER TO THE COVER PAGES.

APPROVED FOR CONSTRUCTION		
Date	Initials	Signature
30-Nov-23	E.Simonito	

UNIT : 2120	LINE NO.: 24”-CWS-40G02-B-1 (P)	
CWA : 2121	SP NO.: SP-043	SUPPORT NO.: 5031

ATTACHMENT SP-043 OF BELOW DOCUMENT

							REALIZADO PREPARED	30-Nov-23	M.AZHAR	ESCALA: SCALE:	CONTRATISTA: CONTRACTOR:	TITULO: TITLE:
							COMPROB. CHECKED	30-Nov-23	H.JADHAV	1:25	4274-XH-DC-21210001	
00	ISSUED FOR CONSTRUCTION	30-Nov-23	M.AZHAR	H.JADHAV	G.PAGANONI		APROBADO APPROVED	30-Nov-23	G.PAGANONI	TAMAÑO: SIZE:	PROYECTO: PROJECT:	
REV. REV.	DESCRIPCIÓN DESCRIPTION	FECHA DATE	REALIZ. PREP.	COMPR. CHCK.	APROB. APPROV.	Vº CLIENTE CLIENT APPROVAL				DIN-A3	4001008	

PIPE SPECIAL SUPPORT DRAWING

REPSOL		NEGOCIO: BUSINESS:		REPSOL POLYMEROS	
Tecnimont		CENTRO: FACILITY:		SINES INDUSTRIAL COMPLEX	
ÁREA/ANEXO: AREA/ANNEX:	CLASIF.: CLASIF.:	PLANO N°: DRAWING NUMBER:	REV.:		
19	L	19-000-2-03-85121	00		